OSP5953

54

(12) UK Patent Application (19) GB (11) 2 151 862 A

(21) Application No 8429434

(22) Date of filing 21 Nov 1984

(30) Priority data

(31) 8331254 (32) 23 Nov 1983 (33) GB

(71) Applicant
The General Electric Company plc (United Kingdom),
1 Stanhope Gate, London W1A 1EH

(72) Inventors
Philip Henry Mellor,
David Robert Turner

(74) Agent and/or Address for Service
M. B. W. Pope,
Central Patent Department (Wembley Office); The General
Electric Company plc, Hirst Research Centre, Wembley,
Middlesex HA9 7PP

(51) INT CL⁴
H02H 6/00

(52) Domestic classification
H2K 252 254 360 512 76Y JE
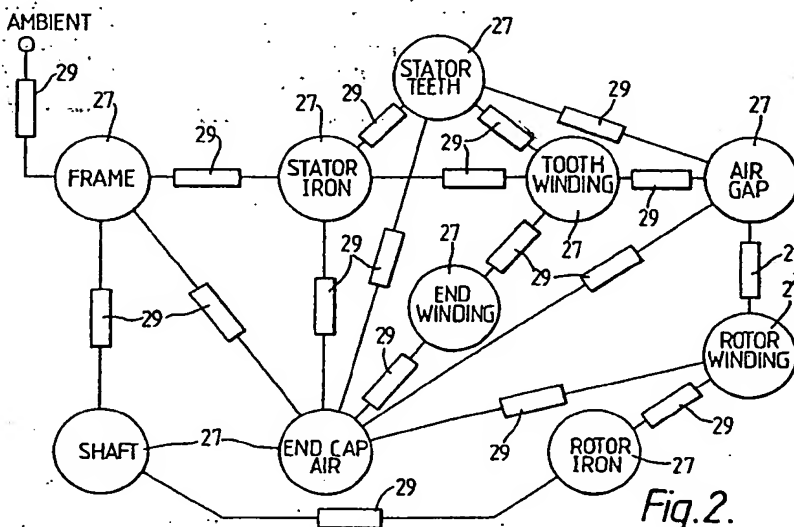U1S 2047 H2K

(56) Documents cited
GB A 2120476

(58) Field of search
H2K

(54) Apparatus for determining
temperature

(57) An apparatus for determining
temperature in an electrical equipment
wherein estimates of the temperatures
at predetermined locations in the
equipment are obtained from samples
of the voltage and current supplied to
the equipment using a thermal model
of the equipment comprising a number
of nodes (27) interconnected by paths
of predetermined thermal conductivity
(29), each node having a predetermined
thermal capacity and/or a
predetermined thermal generating
capability dependent on the sample
values of voltage and current.
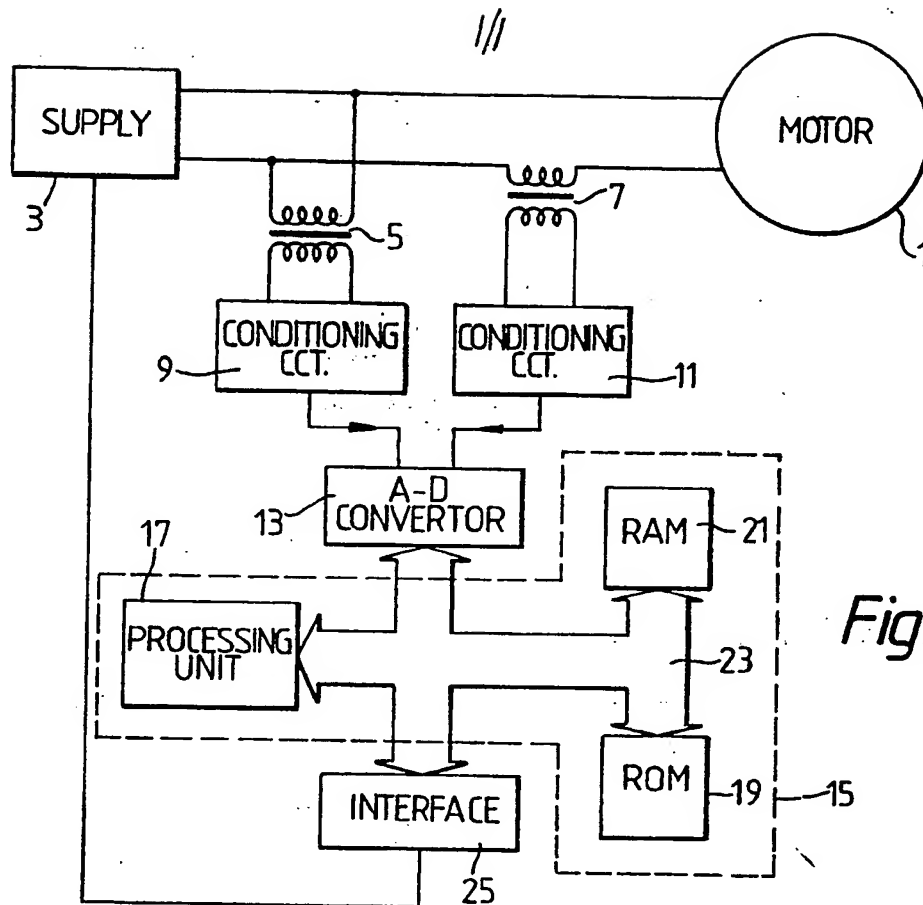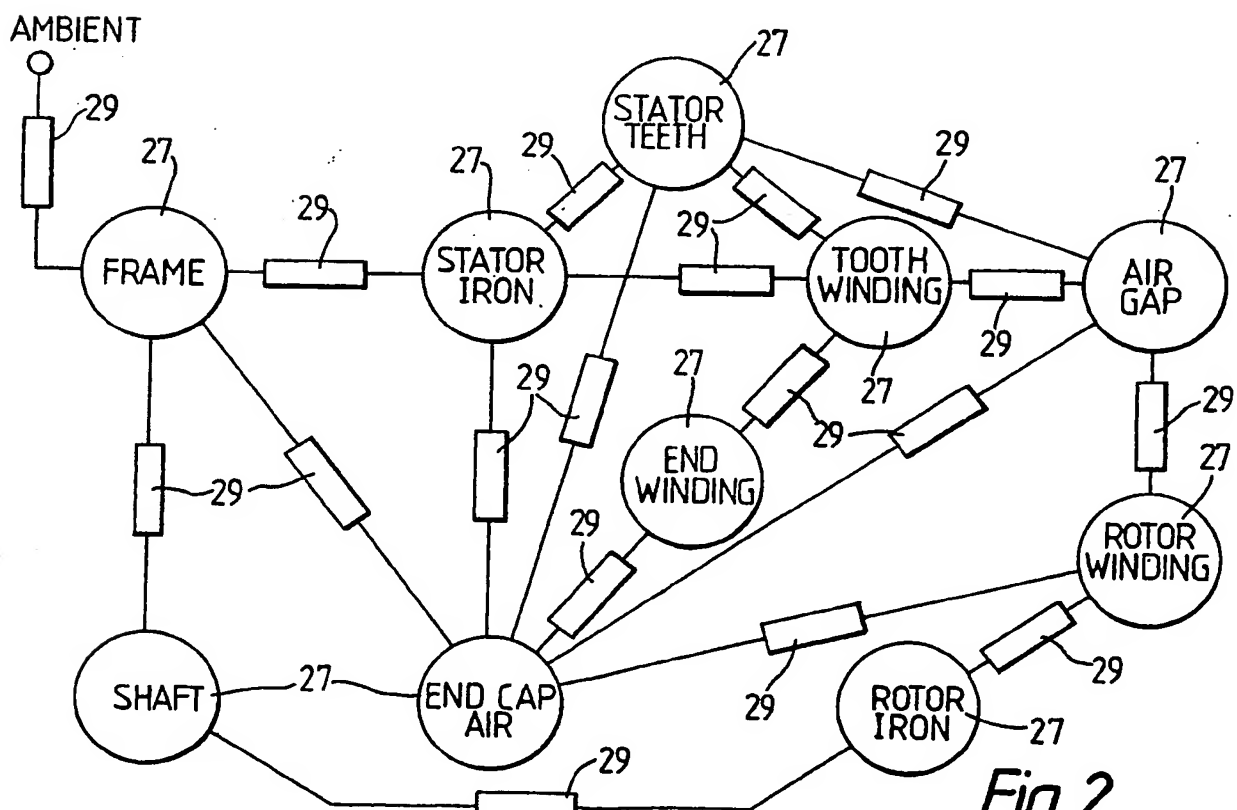
Fig.2.

GB 2 151 862 A

1//

SUPPLY

MOTOR

3

5

7

1

CONDITIONING CCT.

9

CONDITIONING CCT.

11

A-D CONVERTOR

13

RAM

21

17

PROCESSING UNIT

23

ROM

19

15

INTERFACE

25

Fig.1.

AMBIENT

29

27

STATOR TEETH

29

29

27

27

29

29

27

FRAME

29

STATOR IRON

29

TOOTH WINDING

29

AIR GAP

29

29

27

27

END WINDING

27

27

29

29

29

ROTOR WINDING

29

SHAFT

27

END CAP AIR

29

ROTOR IRON

27

29

29

Fig 2.

SPECIFICATION

Apparatus for determining temperature in electrical equipment

5 This invention relates to apparatus for determining temperature in electrical equipment.
   The most direct method of determining temperature in electrical equipment is by the insertion of
electronic temperature detectors, such as thermocouples, thermistors or platinum resistance elements, at
suitable places in the equipment, and monitoring the outputs of the detectors. This approach has the
disadvantage that it is difficult to locate the detectors in the places in the equipment which are of most
10 interest, and that the provision of accurate detection and monitoring circuits and the associated leads is
difficult and costly.
   An alternative approach is to provide an electric circuit which simiultes the thermal behaviour of the
equipment. Known such arrangements range from a simple bi-metal element arranged to be heated by the
current supplied to the equipment to complex analogue circuits in which different sections of the thermal
15 circuit of the equipment are represented by resistor-capacitor combinations and the heat generated in the
equipment is represented by current or voltage sources interconnected by the resistor-capacitor
combinations. However, to obtain satisfactory results from such an arrangement a very complex analogue
circuit is required to which additional circuitry has to be added to compensate for long term non-linearities in
the resistor-capacitor combinations.
20   It is an object of the present invention to provide an apparatus for determining temperature in electrical
equipment which overcomes the above difficulties.
   According to the present invention an apparatus for determining temperature in an electrical equipment
comprises: means for periodically sampling voltage and current conditions of the equipment; and digital
computer means responsive to the sampled values of current and voltage to estimate the temperature of at
25 least one predetermined location in the equipment by calculations based on a thermal model of the
equipment comprising a number of nodes interconnected by paths of predetermined thermal conductivity,
each node having a predetermined thermal generating capability dependent on the sampled values of
current and voltage and/or a predetermined thermal capacity.
   In a preferred arrangement in accordance with the invention the computer means if further arranged to
30 estimate the future temperature at said location in the equipment.
   It will be appreciated that an apparatus in accordance with the invention will normally be arranged to
estimate the temperature at two or more locations in the equipment simultaneously.
   An apparatus in accordance with the invention is suitably associated with control means whereby control
of the equipment operation may be effected in response to the temperature of the equipment as estimated
35 by the computer means.
   One apparatus in accordance with the invention will now be described by way of example with reference
to the accompanying drawings in which:-
   Figure 1 is a block schematic diagram of the apparatus; and
   Figure 2 illustrates a thermal model of a machine whose temperature is determined by the apparatus.
40   Referring to Figure 1, the apparatus is arranged to determine the temperature at various locations in a
single phase alternating current motor 1 energised from a supply 3.
   The apparatus includes voltage and current transformers 5 and 7 which produce reduced scale replicas of
the voltage and current supplied to the motor 1. The output of the transformers 5 and 7 are passed via
respective conditioning circuits 9 and 11 to an analogue-to-digital convertor circuit 13.
45   The apparatus further includes computer means in the form of a microprocessor 15 comprising a
processing unit 17 interconnected with read-only memory (ROM) 19 and a random access memory (RAM) 21
via a data bus 23 in conventional manner.
   In operation, under control of a program stored in the RAM 21 the processor unit 17 periodically samples
the digital signals at the output of the converter 13 which are representative of the values of the supply
50 voltage and current. Using the samples values, the processor then performs calculations, as further
described below to obtain periodically an estimation of the current temperature at one or more locations in
the motor.
   It will be appreciated that the temperature estimations also require a knowledge of ambient temperature
which may be assumed constant and stored in the RAM 21 or may be measured by an electrical
55 thermometer (not shown).
   The estimated values of motor temperature are outputted for use in any desired manner via an interface
25.
   The estimated values may, for example, simply be used to operate a display device (not shown) to provide
a visual display of the estimated temperatures.
60   Alternatively, the estimated values may be used to control the operation of the motor, for example, so as
to cut off the electric supply to the motor if an estimated temperature exceeds a predetermined maximum
permitted value.
   The desired control function may be effected under control of the microprocessor, as indicated in Figure 1.
Alternatively the desired control function may be effected under control of a dedicated machine controller
65 (not shown) to which the interface 25 supplies signals representative of estimated temperature.

In addition to estimating current temperature, the microprocessor 15 may also be arranged to predict future temperature on the basis of an assumed pattern of future motor loading.

Calculation of temperature by the microprocessor 15 is based on a thermal model of the motor of the form illustrated in Figure 2.

5 The thermal model comprises a number of nodes 27 each of which is representative of a different component of the motor structure, for eample, the motor frame, the stator iron, etc., as shown in Figure 2. Each node 27 is assigned a predetermined thermal capacity and a predetermined thermal generating capability, the latter depending also on the voltage and current supplied to the motor. The modes 27 are interconnected by paths 29 of predetermined thermal conductivity.

10 The differential equations that describe the thermal operation of the model can be written in the matrix form

$$C\frac{d\theta}{dt} = A\theta + G \qquad (1)$$

where
  θ represents the nodal temperture matrix
  C represents the thermal capacitance matrix
20 A represents the thermal conductance matrix and
  G represents the nodal heat generation matrix
  The mathematical solution of equation (1) is:

$$\theta(t) = e^{A't}\theta(o) + e^{A't}\int_0^t e^{-A't}G'dt \qquad (2)$$

where
  $A' = C^{-1}A$;
30 $G' = C^{-1}G$; and
  $\theta(o)$ is the temperature at time $t = 0$ (i.e. the initial temperature).

Assuming heat generation remains constant over a period T, equation (2) can be rewritten to give current temperature by step by step calculations, as follows:

$$\theta(nT) = e^{A'T}\theta[(n-1)T] + A'^{-1}(e^{A'T} - 1)G' \qquad (3)$$

where
40 $\theta[(n-1)T]$ represents the nodal temperature matrix before step n
  $\theta(nT)$ represents the nodal temperature matrix after step n; and
  G' represents the nodal heat generation matrix over period T
  G' is a linear matrix function of the machine voltage and current during the nth period, that is

$$G' = Ri^2 + Yv^2 \qquad (4)$$

where
50 i represents machine current;
  v represents machine voltage; and
  R and Y are constant matrices
  Also the constant matrices $e^{A'T}$ and $A'^{-1}(e^{A'T} - 1)$ in equation (3) can be calculated for a given step period T using eigen value/vector techniques.

55 It will be appreciated that in the thermal model shown in Figure 2 some of the nodes, e.g. the air gap node, may be assumed to have zero thermal capacitance. If desired, such nodes may be eliminated using standard matrix operations and the order of the matrix equation correspondingly reduced to simplify the calculations carried out by the microprocessor.

In one embodiment of the invention in which temperature calculation was based on a fifteen node thermal 60 model reduced to eight nodes as described above, motor voltage and current were sampled at one second intervals and the microprocessor performed the matrix calculations (3) and (4) to estimate current machine temperature within 0.1 second. The remaining 0.9 second could then be used to predict future temperature.

It will be understood that whilst the apparatus described above the way of example is utilised to determine temperature in an electric motor, an apparatus in accordance with the invention may be used to determine 65 temperature in any electric equipment which can be thermally modelled.

CLAIMS

1. An apparatus for determining temperature in an electrical equipment comprising means for periodically sampling voltage and current conditions of the equipment; and digital computer means
5 responsive to the sampled values of current and voltage to estimate the temperature of at least one predetermined location in the equipment by calculations based on a thermal model of the equipment comprising a number of nodes interconnected by paths of predetermined thermal conductivity, each node having a predetermined thermal generating capability dependent on the sampled values of current and voltage and/or a predetermined thermal capacity.

10 2. An apparatus according to Claim 1 wherein said computer means is further arranged to predict the future temperature at said location.

3. An apparatus according to Claim 1 or Claim 2 wherein said computer means is arranged to estimate the temperature at two or more locations in the equipment simultaneously.

4. An apparatus according to any one of the preceding claims associated with control means whereby
15 control of the equipment operation is effected in response to the temperature of the equipment as estimated by said computer means.

5. An apparatus according to any one of the preceding claims wherein said equipment is an electric motor and said voltage and current conditions are the voltage and current supplied to the motor.

6. An apparatus for determining temperature in an electrical equipment substantially as hereinbefore
20 described with reference to the accompanying drawings.

5

10

15

20